

The Eliminator



Model SW-20

SW-20E-OS



Lay down door and rollout turntable makes for easy loading and unloading. Lay down door keeps the shop floor drier and cleaner.

SW-20E-HT



The AXE Eliminator SW-20 Combination Spraywasher/Hot Tank is packed with plenty of cleaning power. The 32" vertical capacity and 20" diameter roll out turntable will accommodate most passenger and light truck applications, including straight six and big blocks. The Eliminator has two built in hot tank sizes available. The SW-20-OS Model has a 12" x 24" x 11" hot tank size and the SW-20-HT Model has a 21" x 30" x 11" hot tank size. This unique design offers additional cleaning features and it makes cleanout easy with its wide open reservoirs. Both Models are available in gas or electric heat.



Gear driven turntable with spring loaded safety clutch guarantees consistent turntable rotation within the spray chamber for a complete cleaning job.



All AXE Spraywashers include a bullet proof fully protected electrical system to insure long life for your motors, switches, and heating system.




A well designed spray manifold is a key component for good cleaning. The Blue Max series uses large 2" diameter tubing with smooth radius style elbows in a 360 degree design inside the spray chamber for a non restrictive flow. Couple this design with its 5 hp pump and you get 80 gallons of hot water every minute over the parts inside with 50 psi of pressure for quickly sheering away grease and grime.

Call or Click
800-251-0018

www.axeequipment.com



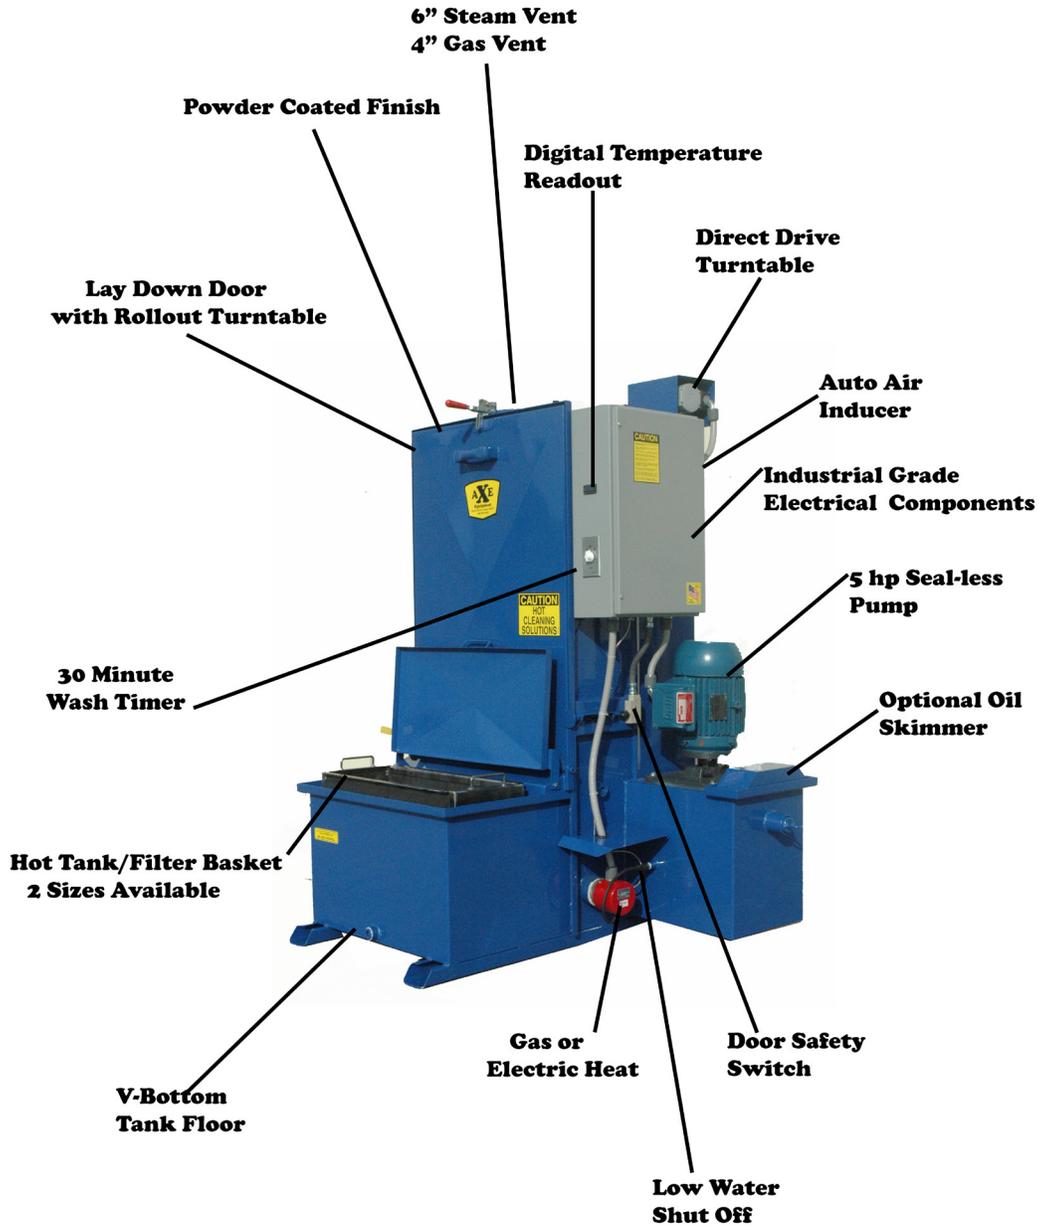

AXE Equipment
1040 N. Union
Council Grove, KS 66846
www.axeequipment.com
perry@axeequipment.com



1-800-251-0018

For Quality and Efficiency Look To AXE

MODEL	SW20-OS	SW20-HT
WORK CAPACITY		
HEIGHT	32"	32"
ROLLOUT TURNTABLE	20"	20"
LOAD WEIGHT CAPACITY	500	500
FLOOR SPACE REQUIRED		
HEIGHT	66"	66"
WIDTH	48"	55"
LENGTH: DOOR OPEN	66"	66"
DOOR CLOSED	44"	60"
LOADING HEIGHT	27"	27"
CLEANING SYSTEM		
SOLUTION CAPACITY	55 gals.	80 gals.
PUMP MOTOR	5 HP	5 HP
PUMP OUTPUT	(50 psi @ 80gpm)	(50 psi @ 80gpm)
SPRAYNOZZLES	18	18
MANIFOLD SIZE	1.5" WELDED	1.5" WELDED
MANIFOLD CONFIGURATION	360	360
FILTER SCREEN	695 sq."	1290 sq."
TURNTABLE DRIVE	GEAR DRIVE	GEAR DRIVE
CABINET CONSTRUCTION		
GAUGE STEEL	12 gauge	12 gauge
STEAM VENT	6"	6"
GAS VENT	4"	4"
DOOR DESIGN	LAY DOWN	LAY DOWN
DOOR SEALS	NONE	NONE
HEAT SOURCE		
ELECTRIC ELEMENT	7.5 KW	10 KW
GAS BURNER	75,000	80,000
HOT TANK BASKETS		
WIDTH (.D.)	11"	21"
LENGTH (I.D.)	24"	30"
DEPTH (.D.)	11"	11"
ELECTRICAL REQ.		
PUMP MOTOR 3 PHASE AMP DRAW	208 / 230 / 460 Volts 13 12 6.0 Amps	
ELECTRIC HEAT 3 PHASE AMP DRAW	(7.5 KW) 208/230/460 Volts 21-19-10 Amps	(10 KW) 208/230/460 Volts 26-25-13 Amps
*ELECTRICAL OPTIONS		
5 HP PUMP MOTOR 1 PHASE	230 Volts, 21 Amps	
ELECTRIC HEATER 1 PHASE	(7.5KW) 230 Volts 33 Amps	(10 KW) 230 Volts 44 Amps
Shipping Weight	900 lbs	1000 lbs
STANDARD EQUIPMENT		
LOW WATER SWITCH	STANDARD ELECTRIC MACHINES	
DUAL 7 DAY TIMERS	STANDARD	
DIGITAL TEMP CONTROLLER	STANDARD	
ADJUSTABLE HEAD RACK/CRANK RACK	STANDARD	
AUTO AIR INDUCER	STANDARD	
SHORT CIRCUIT PROTECTION	STANDARD	
THERMAL PROTECTION	STANDARD	
LAY DOWN DOOR/SEALESS	STANDARD	
V-BOTTOM FLOOR	STANDARD	
BUILT IN HOT TANK	STANDARD	
MOISTURE PROOF ELECTRONICS	STANDARD/GAS MACHINES	
360 DEGREE MANIFOLD	STANDARD	
WARRANTY	ONE YEAR	