


The Terminator Series

Model SW-2432 & Model SW2444



The new Terminator series is equipped with a 24" diameter turntable and a choice of a 32" or 44" vertical capacity. This all new exclusive design is powered by a 5 hp pump, gear driven rollout turntable, and a built in hot tank.

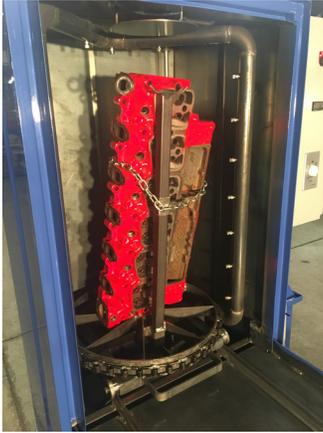

The Terminator **SW2432** includes a clear 32" vertical height and a 24" rollout diameter turntable. SW2432 model shown with 5.9L Cummins



The Terminator **SW2444** has a clear 44" vertical height. The 24" diameter turntable supports a 500 pound weight capacity and rolls in and out with minimal effort. Shown with Cummins ISX Cylinder Head

Model SW2444



Terminator models use a large 1.50" diameter tubing with smooth radius style elbows in a 360 degree design inside the spray chamber for a non restrictive water flow



360 degree spraychamber



Gear driven turntable with spring loaded safety clutch engages in turntable that guarantees consistent turntable rotation within the spraychamber for a complete cleaning job.

All AXE Spraywashers include a fully protected electrical system to insure long life for your motors, switches, and heating system. AXE machines include a programmable 7 day timer for the heat source and a Digital Temperature controller for monitoring the heat.



OS includes Built In 9" x 30" Hot Tank Basket

AXE Equipment

1040 n. Union

Council Grove, KS 66846

800-251-0018/fax 620-767-5482

axeequipment@tctelco.net

www.axeequipment.com



MACHINE SPECIFICATIONS

*Specifications subject to change without notice.

MODEL	SW2432-OS	SW2432-HT	SW2444-OS	SW2444-HT
WORK CAPACITY				
HEIGHT	32"	32"	44"	44"
ROLLOUT TURNTABLE	24"	24"	24"	24"
LOAD WEIGHT CAPACITY	500	500	500	500
FLOOR SPACE REQUIRED				
HEIGHT	66"	66"	80"	80"
WIDTH	55"	67"	55"	67"
LENGTH: DOOR OPEN	73"	73"	85"	85"
DOOR CLOSED	53"	60"	53"	60"
LOADING HEIGHT	27"	27"	27"	27"
CLEANING SYSTEM				
SOLUTION CAPACITY	70 gals.	95 gals.	70 gals.	95 gals.
PUMP MOTOR	5 HP	5 HP	5 HP	5 HP
PUMP OUTPUT	(50 psi @ 80gpm)	(50 psi @ 80gpm)	(50 psi @ 80gpm)	(50 psi @ 80gpm)
SPRAYNOZZLES	23	23	23	23
MANIFOLD SIZE	1.5" WELDED	1.5" WELDED	1.5" WELDED	1.5" WELDED
MANIFOLD CONFIGURATION	360	360	360	360
FILTER SCREEN	695 sq."	1290 sq."	695 sq."	1290 sq."
TURNTABLE DRIVE	GEAR DRIVE	GEAR DRIVE	GEAR DRIVE	GEAR DRIVE
CABINET CONSTRUCTION				
GAUGE STEEL	12 gauge	12 gauge	12 gauge	12 gauge
STEAM VENT	6"	6"	6"	6"
GAS VENT	4"	4"	4"	4"
DOOR DESIGN	LAY DOWN	LAY DOWN	LAY DOWN	LAY DOWN
DOOR SEALS	NONE	NONE	NONE	NONE
HEAT SOURCE				
ELECTRIC ELEMENT	10 KW	10 KW	10 KW	10 KW
GAS BURNER	75,000 btu	85,000 btu	75,000 btu	85,000 btu
HOT TANK BASKETS				
WIDTH (I.D.)	9"	21"	9"	21"
LENGTH (I.D.)	30"	34"	30"	34"
DEPTH (I.D.)	10"	11"	11"	11"
ELECTRICAL REQ.				
PUMP MOTOR 3 PHASE AMP DRAW	208 / 230 / 460 Volts 13 12 6.0 Amps		208 / 230 / 460 Volts 13 12 6.0 Amps	
ELECTRIC HEAT 3 PHASE AMP DRAW	(10 KW	(10 KW	(10 KW	(10 KW
	208/230/460 Volts	208/230/460 Volts	208/230/460 Volts	208/230/460 Volts
	28-25-13 Amps	28-25-13 Amps	28-25-13 Amps	28-25-13 Amps
*ELECTRICAL OPTIONS				
5 HP PUMP MOTOR 1 PHASE	230 Volts, 21 Amps		230 Volts, 21 Amps	
ELECTRIC HEATER 1 PHASE	(10 KW) 230 Volts	(10 KW) 230 Volts	(10 KW) 230 Volts	(10 KW) 230 Volts
	44 Amps	44 Amps	44 Amps	44 Amps
Shipping Weight	1000 lbs	1300 lbs	1000 lbs	1300 lbs
STANDARD EQUIPMENT				
LOW WATER SWITCH	STANDARD		STANDARD	
DUAL 7 DAY TIMERS	STANDARD		STANDARD	
DIGITAL TEMP CONTROLLER	STANDARD		STANDARD	
ADJUSTABLE HEAD RACK/CRANK RACK	STANDARD		STANDARD	
AUTO AIR INDUCER	STANDARD		STANDARD	
SHORT CIRCUIT PROTECTION	STANDARD		STANDARD	
THERMAL PROTECTION	STANDARD		STANDARD	
LAY DOWN DOOR/SEALESS	STANDARD		STANDARD	
V-BOTTOM FLOOR	STANDARD		STANDARD	
BUILT IN HOT TANK	STANDARD		STANDARD	
360 DEGREE MANIFOLD	STANDARD		STANDARD	
WARRANTY	ONE YEAR		ONE YEAR	
INSULATION	OPTIONAL		OPTIONAL	